



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



DC590+ Integrator Series 2

DC Drives 3 HP - 2000 HP (15A - 2400A)



ENGINEERING YOUR SUCCESS.

DC590+ DC Drive Integrator Series 2

Digital DC Drives - 3 to 2000 HP (15A – 2400A)

Product Overview

The DC590+ Integrator Series 2 sees the next step in the development of DC drive technology, derived from over 30 years experience in designing DC drives. With its innovative 32-bit control architecture, the DC590+ has the flexibility and functionality to more than meet the requirements

of all applications, from basic motor installations through to the most demanding multi-motor systems.

The DC590+ is also available as a “ready to install” drive package called the DRV. This is a single integrated module that includes all the associated power components



within the package. This innovative approach radically reduces design time, panel space, wiring time and cost. The DRV concept is unique and comes from the experience gained from thousands of successful applications across a diverse range of industries.

The DC590+ is easily integrated into new or existing systems, offering improved levels of performance and productivity.

As part of the full DC drives product range, the DC590+ further confirms Parker SSD Drives’ position as the market leader in DC drive technology.



Product Overview Chart

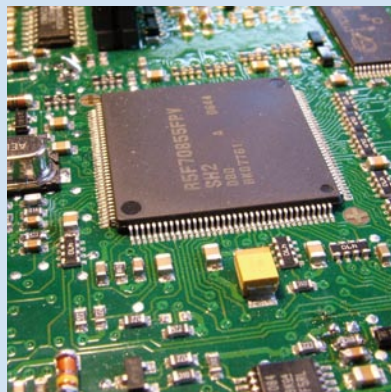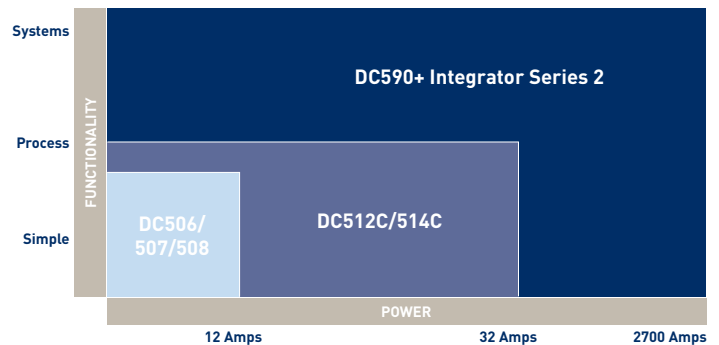

Advanced Control Architecture

Benefitting from the improved performance of a 32-bit RISC processor, the **DC590+ Integrator Series 2** delivers enhanced functionality and increased flexibility, making it suitable for use in a wider range of more complex applications.

- Faster drive response
- Greater control capabilities
- Increased math and logic function blocks
- Enhanced diagnostic and programming functionality
- Common programming tools with other SSD Drives models

Next Generation Technology

Building upon the highly successful DC590+ drive used in thousands of applications world-wide, the DC590+ Integrator Series 2 drive takes DC motor control to the next level. With its state-of-the-art advanced 32-bit control architecture, the DC590+ drive delivers highly functional and flexible control suited to a whole host of industrial applications.

Providing control for some of the most demanding motor control applications, Parker's DC experience and technologies are some of the most advanced in the industrial marketplace. With drives from 1 Amp through to 2700 Amps, Parker can provide the optimum solution to suit any application.

Typical Applications

- **Converting machinery**
- **Plastics and rubber processing machinery**
- **Wire and cable**
- **Material handling**
- **Automotive**

Function Block Programming

Function Block Programming is a tremendously flexible control structure that allows an almost infinite combination of user functions to be realized with ease. Each control function (an input, output, process PID for example) is represented as a software block that can be freely interconnected to all other blocks to provide any desired action.

The drive is shipped with the function blocks pre-configured as a standard DC drive so you can operate it straight from the box without further adjustments. Alternatively you can create your own control strategy with DSE Lite software, often eliminating the need for an external PLC and its associated complexity and cost.

Feedback Options

The DC590+ has a range of options which are compatible with the most common feedback devices enabling simple motor control through to the most sophisticated multi-motor system. Armature voltage feedback is standard without the need for any interface option.

- **Analog tach generator - AC or DC**
- **Encoder - 5, 12, 15, or 24V**
- **Optical fiber microtach encoder**

Interface Options

Designed with connectivity in mind, the DC590+ has a number of communications and I/O options that allow the drive to take control of the application, or be integrated into a larger system. When combined with function programming, custom functions and control can be easily created offering the user a highly flexible and versatile platform for DC motor control.

Programming/Operator Controls

Featuring an intuitive menu structure, the ergonomically designed operator panel allows quick and easy access to all parameters and functions of the drive via a bright, easy to read backlit display and tactile keypad. Additionally, it provides local control of start/stop, speed demand and rotation direction to greatly assist with machine commissioning.

- **Multi-Language alpha-numeric display**
- **Customized parameter values and legends**
- **On drive or remote mounting**
- **Local control of start/stop, speed and direction**
- **Quick set-up menu**

Connectivity

Whatever the complexity of your control scheme, the DC590+ has the interface to suit. As standard there's enough analog and digital I/O for the most complex applications. Alternatively, add the relevant 'technology box' for immediate access to serial communications and Fieldbus networks. The DC590+ has been designed to fit seamlessly, and without compromise, into any control environment.

Analog/Digital Control

- **5 Analog Inputs (12 bit + sign)**
- **3 Analog Outputs**
- **9 Digital Inputs (5 configurable)**
- **3 Digital Outputs**

Serial Communications and Fieldbus Options

- **Profibus-DP**
- **Canopen**
- **Modbus RTU**
- **RS422/RS485**
- **Controlnet**
- **Ei Bisynch**
- **LINK**
- **Devicenet**
- **Modbus+**
- **Ethernet**

All DC590+ units are available as non-regenerative or full 4-Quadrant regenerative models



Standard 6901 MMI/Programming Keypad is easy to use, and may be remote mounted. It is compatible with other SSD Drives models

**DRV - Packaged
DC Drive Technology**

The DC590+ is available in either module, or alternatively 'DRV' format.

The DRV version is a self-contained packaged drive that includes all the peripheral power components associated with a DC drive system, integrally fitted within the footprint area of the drive.

DRV version includes:

- AC line or DC armature contactor
- AC line fuses
- DC fuse (regenerative version)
- Control/field fuses
- Provision for optional motor blower starter
- Provision for optional auxiliary control transformer

Saving You:

- Design time
- Panel space
- Component mounting and wiring
- Component sourcing
- Complexity
- Time and cost



Traditional DC Drive Section



DC590+ DRV equivalent, illustrating panel space saving and simplification of panel wiring

DC590+ Designed for Systems


The DC590+ Integrator Series is the ultimate system drive, designed to meet the exacting demands of the most complex and sophisticated multi-drive applications across a diverse range of industries. All the following functions are available as standard without the need for any additional hardware.

- Function Block Programming
- Software Configurable I/O
- High Resolution (12 bit) Analog Inputs
- Winder Control
 - Open loop with inertia compensation
 - Closed loop speed or current
 - Load cell/dancer process PID
- Math Functions
- Logic Functions
- Controlled Field Supply
- 'S' Ramp and Digital Ramp

DC590+ Designed For A World Market

The DC590+ is available with full application and service support in over fifty countries worldwide. So wherever you are, you can be confident of full back up and support.

- Support in over 50 countries
- Multi-language menus
- Input voltage ranges from 220-690V (Special voltages available)
- CE marked
- UL and c-UL listed through 500 HP
- 50/60Hz

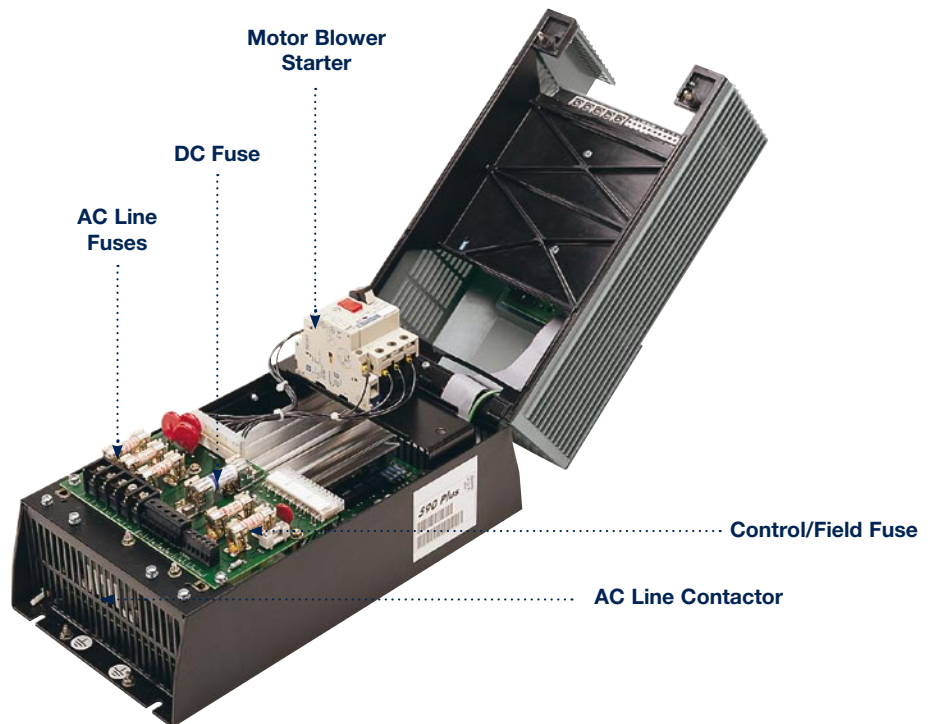

Specification

Ratings Power Configuration

DC590+ Four Quadrant Regenerative;
 2 Fully Controlled Three Phase Thyristor Bridges
 DC591+ Two Quadrant Non-Regenerative;
 1 Fully Controlled Three Phase Thyristor Bridge

Thyristor Controlled Variable Field Supply

Field Current (Amps DC)

4A Frame 1
 10A Frame 2 and 3
 30A Frame 4
 60A Frame 6 and H

Field Voltage (VDC)

AC Input x 0.9 maximum

Armature Current Ratings (Amps DC)

See table below for ratings.
 Overload 200% for 10 secs, 150% for 30 secs
 Higher ratings with reduced overloads available
 Please refer to manual

Armature Voltage (VDC)

AC Input x 1.2 maximum

AC Supply Voltage (VAC)

110 - 220V (±10%) All Sizes
 220 - 500V (±10%) All Sizes
 500 - 600V (±10%) Frame 4, 6, and H
 600 - 690V (±10%) Frame 6 and H
 50/60Hz Three Phase

Environment

Ambient Operating Temperature

0°-45°C (32°-113°F) Frame 1 and 2
 0°-40°C (32°-104°F) Frame 3, 4, 6 and H
 Derate 1% per °C above ambient to 55°C (131°F) max

Operating Altitude

Up to 1640 ft (500m) above sea level
 Derate 1% per 656 ft (200m) above 1640 ft (500m) to maximum of 16,400 ft (5000m)

Protection

High Energy MOV's
 Heatsink Overtemperature
 Instantaneous Overcurrent
 Thyristor Trigger Failure
 Inverse Time Overcurrent
 Interline Snubber Network
 Field Failure
 Zero Speed Detection
 Speed Feedback Failure
 Standstill Logic
 Motor Overtemperature
 Stall Protection

Inputs/Outputs

Analog Inputs (5 Total - 12 bit plus sign)

1 - Speed Demand Setpoint (-10/0/+10V)
 4 - Configurable

Analog Outputs (3 Total - 11 bit plus sign)

1 - Armature Current Output (-10/0/+10V or 0 - 10V)
 2 - Configurable

Digital Inputs (9 Total - 24VDC max)

1 - Program Stop
 1 - Coast Stop
 1 - External Trip
 1 - Start/Run
 5 - Configurable

Thermistor Input

1 - Isolated

Digital Outputs (3 Total - 24V(max 30V) 100mA)

Short circuit protected
 3 - Configurable

Reference Supplies

1 - +10VDC
 1 - -10VDC
 1 - +24VDC

Optional Equipment

6911 Operator/Programming Controller
 Feedback Boards

- Tach generator
- Encoder
- Optical Fiber Microtach Encoder


Communication Technology Box

- LINK
- Profibus DP
- Devicenet
- Controlnet
- Ethernet
- Canopen
- Modbus +
- EI Bisynch/Modbus/RS422/RS485

Standards

- The DC590+ series meets the following standards when installed in accordance with the relevant product manual:
- CE Marked to EN50178 (Safety, Low Voltage Directive)
- CE Marked to EN61800-3 (EMC Directive)
- UL listed to safety standard UL508C through 500 HP
- cUL listed to Canadian standard C22.2 #14 through 500 HP

Valid at time of print

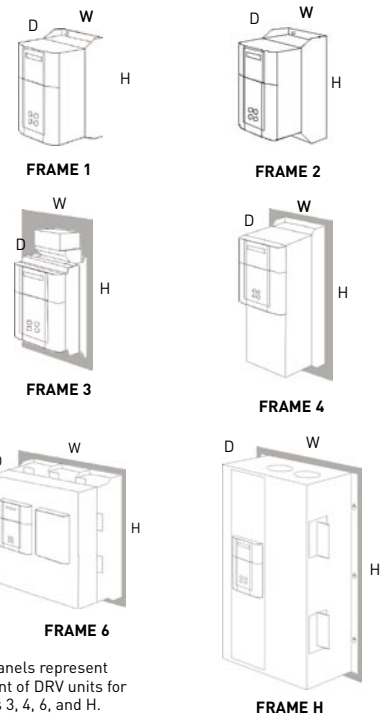

Gray panels represent footprint of DRW units for frames 3, 4, 6, and H.

Frame 1-4 have integral cooling fan assemblies where required. Optional ducting kit for cubicle roof external ventilation available for frame 4. Frame Size H has fan cooling assembly that can be cubicle roof mounted or drive mounted. Add 5.9" (150mm) to overall height for drive mounted option.

Note: Dimension table includes only the 230/460 volt ratings. Drives for a wide range of input voltages are available. For product codes, current ratings, and dimensional data on 110-220 volt, 575 volt, and 690 volt units, please consult factory. Drives of higher power ratings can also be provided upon request.

Dimensions - For estimation only

Product Code	Non-Regenerative	Regenerative	HP Rating	Amps	Frame	Dimensions (in/mm)		
			(230/460)	(Max)		H	W	D
955+8N0007	955+8R0007	3/7.5	15	1	14.8/375	7.9/200	8.7/220	
955+8N0020	955+8R0020	10/20	35	1	14.8/375	7.9/200	8.7/220	
955+8N0030	955+8R0030	15/30	55	2	21.5/546	7.9/200	11.5/292	
955+8N0040	955+8R0040	20/40	70	2	21.5/546	7.9/200	11.5/292	
955+8N0050	955+8R0050	25/50	90	2	21.5/546	7.9/200	11.5/292	
955+8N0060	955+8R0060	30/60	110	2	21.5/546	7.9/200	11.5/292	
955+8N0075	955+8R0075	40/75	125	2	21.5/546	7.9/200	11.5/292	
955+8N0100	955+8R0100	50/100	165	2	21.5/546	7.9/200	11.5/292	
955+8N0125-A3	955+8R0125	60/125	206	3	28.9/735	17.0/432	8.4/213	
955+8N0125	955+8R0125	60/125	206	3	27.0/686	17.0/432	8.4/213	
955+8N0150-A3	955+8R0150	75/150	246	3	28.9 735	17.0/432	8.4/213	
955+8N0150	955+8R0150	75/150	246	3	27.0 686	17.0/432	8.4/213	
955+8N0200-A4	955+8R0200	100/200	360	4	54.0/1372	18.0/457	14.9/378	
955+8N0200-D4	955+8R0200	100/200	360	4	39.0/991	21.0/533	15.1/384	
955+8N0250-A4	955+8R0250	125/250	425	4	54.0/1372	18.0/457	14.9/378	
955+8N0250-D4	955+8R0250	125/250	425	4	39.0/991	21.0/533	15.1/384	
955+8N0300-A4	955+8R0300	150/300	490	4	54.0/1372	18.0/457	14.9/378	
955+8N0300-D4	955+8R0300	150/300	490	4	39.0/991	21.0/533	15.1/384	
955+8N0400-A4	955+8R0400	200/400	700	4	54.0/1372	18.0/457	14.9/378	
955+8N0400-D4	955+8R0400	200/400	700	4	39.0/991	21.0/533	15.1/384	
955+8N0500-A4	955+8R0500	250/500	815	4	54.0/1372	18.0/457	14.9/378	
955+8N0500-D4	955+8R0500	250/500	815	4	39.0/991	21.0/533	15.1/384	
955+8N0700-D6	955+8R0700-D6	700	1200	6	38.0/966	56.0/1422	17.5/444	
955+8N1000-D6	955+8R1000-D6	1000	1600	6	38.0/966	56.0/1422	17.5/444	
955+8N1200-D6	955+8R1200-D6	1200	1950	6	38.0/966	56.0/1422	17.5/444	
955+8N1000	955+8R1000	1000	1600	H	68.0/1727	60.0/1524	17.2/436	
955+8N1250	955+8R1250	1250	2000	H	68.0/1727	60.0/1524	17.2/436	
955+8N1500	955+8R1500	1500	2400	H	68.0/1727	60.0/1524	17.2/436	
591+0243/500	590+0243/500	75/150	243	3	19.1/485	11.8/300	9.2/234	
591+0380/500	590+0380/500	100/200	380	4	27.6/700	10.0/253	14.1/358	
591+0500/500	590+0500/500	150/300	500	4	27.6/700	10.0/253	14.1/358	
591+0725/500	590+0725/500	200/400	725	4	27.6/700	10.0/253	14.1/358	
591+0830/500	590+0830/500	250/500	830	4	27.6/700	10.0/253	14.1/358	
591+1250/500	590+1250/500	750	1250	6	28.1/715	27.0/686	17.3/440	
591+1600/500	590+1600/500	1000	1600	6	28.1/715	27.0/686	17.3/440	
591+1950/500	590+1950/500	1200	1950	6	28.1/715	27.0/686	17.3/440	
591+2000/500	590+2000/500	1250	2000	H	37.6/956 - 55.4/1406*	33.5/850	16.4/417	
591+2400/500	590+2400/500	1500	2400	H	37.6/956 - 55.4/1406*	33.5/850	16.4/417	

Black product code indicates DRV package. Blue product code indicates chassis (controller only) * First dimension is for non-regen, second is for regen

Sales Offices

Australia

Parker Hannifin
Pty Ltd
9 Carrington Road
Private Bag 4, Castle Hill
NSW 1765
Tel: +61 2 9634 7777
Fax: +61 2 9899 6184

Belgium

Parker Hannifin SA NV
Parc Industriel Sud Zone 11
23, Rue du Bosquet
Nivelles B -1400 Belgium
Tel: +32 67 280 900
Fax: +32 67 280 999

Brasil

Parker Hannifin Ind. e Com. Ltda.
Av. Lucas Nogueira Garcez, 2181
Esperança - Caixa Postal 148
Tel: +55 0800 7275374
Fax: +55 12 3954 5262

Canada

Parker Motion and Control
160 Chisholm Drive
Milton
Ontario L9T 3G9
Tel: +1(905)693 3000
Fax: +1(905)876 1958

China

Parker Hannifin Motion & Control
(Shanghai) Co. Ltd.
SSD Drives
280 Yunqiao Road
Export Processing Zone
Pudong District
Shanghai 201206
P.R.China
Tel: +86 (21) 5031 2525
Fax: +86 (21) 5854 7599

France

Parker SSD Parvex
8 Avenue du Lac
B.P. 249
F-21007 Dijon Cedex
Tel: +33 (0)3 80 42 41 40
Fax: +33 (0)3 80 42 41 23

Germany

Parker Hannifin GmbH
Von-Humboldt-Strasse 10
64646 Heppenheim
Germany
Tel: +49(0)6252 798200
Fax: +49(0)6252 798205

India

SSD Drives India Pvt Ltd
151 Developed Plots Estate
Perungudi,
Chennai, 600 096, India
Tel: +91 44 43910799
Fax: +91 44 43910700

Italy

Parker Hannifin SPA
Via Gounod 1
20092 Cinisello Balsamo
Milano
Italy
Tel: +39 02 361081
Fax: +39 02 36108400

Singapore

Parker Hannifin Singapore Pte Ltd
11, Fourth Chin Bee Rd
Singapore 619702
Tel: +65 6887 6300
Fax: +65 6265 5125

Spain

Parker Hannifin (Espana) S.A.
Parque Industrial Las Monjas
Calle de las Estaciones 8
28850 Torrejonde Ardoz
Madrid
Spain
Tel: +34 91 6757300
Fax: +34 91 6757711

Sweden

Parker Hannifin AB
Montörgatan 7
SE-302 60 Halmstad
Sweden
Tel: +46(35)177300
Fax: +46(35)108407

UK

Parker Hannifin Ltd.
Tachbrook Park Drive
Tachbrook Park
Warwick
CV34 6TU
Tel: +44(0)1926 317970
Fax: +44(0)1926 317980

USA

Parker Hannifin Corp.
SSD Drives Division
9225 Forsyth Park Drive
Charlotte NC 28273-3884
Tel: (704) 588 3246
Fax: (704) 588-3249

Parker Hannifin Corporation
SSD Drives Division
9225 Forsyth Park Dr.
Charlotte, NC 28273 USA
Tel: (704) 588-3246 Fax: (704) 588-3249
info.us.ssd@parker.com
www.ssddrives.com/usa

